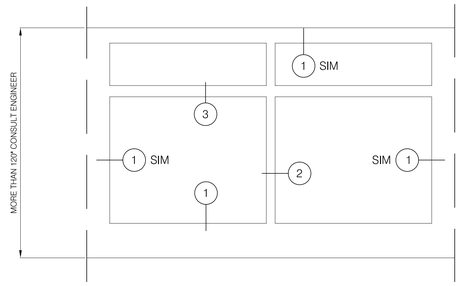

Elevation
Quickframe 2HR
SCALE : 3/8" = 1'-0
144



2 Head Stacked
Quick-Frame 2 Hour
SCALE : 6"=1'-0"
2



1 Alternative Finish
Quick-Frame 2 Hour
SCALE : 6"=1'-0"
2



3 Vertical Joint
Quick-Frame 2 Hour
SCALE : 6"=1'-0"
2

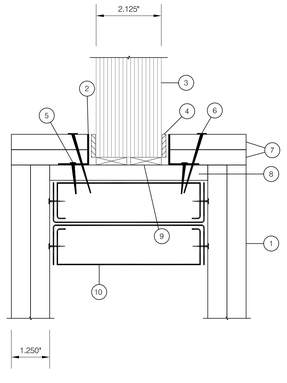

1 Sill
Quick-Frame 2 Hour
SCALE : 6"=1'-0"
2



1 Pyrobel-120
CMU
SCALE : 6"=1'-0"
2

TEST STANDARDS
ASTM E - 119
NFPA-251
UL 263
CANADIAN 45-104

	QUICK-FRAME 2-HOUR WALL
#	DESCRIPTION
1	TWO LAYERS OF 5/8" [18.87 MM] THICK TYPE X OR TYPE C GYPSUM BOARD.
2	1" [25.4 MM] X 1" [25.4 MM] X 18 GAUGE [0.048"/1.21 MM] STEEL ANGLE STOPS [MUST BE CONTINUOUS].
3	NOMINAL 2" [50.84 MM] THICK PYROBEL 120-52 GLAZING PANEL.
4	1/8" [3 MM THICK] X 1/2" [12.7 MM] WIDE CLOSED CELL FOAM TAPE [APPLIED ON BOTH FACES].
5	NO.6, 1" [25.4 MM] LONG TEK SCREWS, 2" [50.8 MM] FROM EACH END AND 12" [404.8 MM] ON CENTER MAXIMUM.
6	2-1/2" [63.5 MM] LONG DRYWALL SCREWS, 2" [50.8 MM] FROM EACH END AND 8" [203.2 MM] ON CENTER MAXIMUM.
7	TWO LAYERS OF 1/2" [12.7 MM] THICK TYPE X OR TYPE C GYPSUM BOARD.
8	ONE LAYER OF 1/2" [12.7 MM] THICK TYPE X OR TYPE C GYPSUM BOARD.
9	3" [76.2 MM] LONG X 1" [25.4 MM] WIDE X 1/4" [6MM] HIGH CALCIUM SILICATE SETTING BLOCKS AT QUARTER POINTS BENEATH THE BOTTOM EDGE OF GLAZING.
10	NOMINAL 3-5/8" [90.07 MM] WIDE, 20 GAUGE [.032"/.8 MM MATERIAL THICKNESS] COLD ROLLED STEEL C STUDS AND TRACK.

InterEdge Technologies
Escondido, CA.

Quick-Frame™
120-MINUTE TEMPERATURE-RISE FRAMING

Consultant
Address
Address
Address
Phone

Consultant
Address
Address
Address
Phone

Consultant
Address
Address
Address
Phone

Consultant
Address
Address
Address
Phone

Consultant
Address
Address
Address
Phone

No.	Description	Date

Quick-Frame System 2 Hr

Project Number	Project Number
Date	Issue Date
Drawn By	Author
Checked By	Checker

A101

Scale

10/9/2009 12:34:21 PM