



Hose Stream Tested



Impact Safety Rated (Platinum-F)

PYRAN® Platinum & Platinum F

Features & Benefits

- Fire rated for 20 to 180 minutes with hose stream
- Specially floated glass-ceramic
- Near optical quality with virtually no distortion
- Transparent and wireless
- Withstands thermal shock
- Applicable for use in fire rated frames with the same fire rating
- Tested to latest positive pressure standards as mandated by IBC and NFPA 5000
- Maximum sheet sizes: approximately 43" X 77"
- Multiple U.S. fabrication locations for fast delivery

Features for PYRAN® Platinum F:


- Impact safety rating ANSI Z97.1 and CPSC 16CFR1201 (Cat. I and II)
- Specially floated glass-ceramic with 3M Scotchshield® Ultra Film

Please note: This product is not a barrier to radiant heat. This product does not meet test standards ASTM E-119, NFPA 251 or UL 263. If your jurisdiction requires a "barrier to heat" product, please contact InterEdge Technologies regarding the Pyrobel® line of fire rated glazings.

Maximum Glazing Sizes (clear view)

	Width	Height	Max. Sq. In.	Stop Height
Doors (Non-Temp. Rise to 90 min.)	36"	76"	2,736"	5/8"
Doors (Temp. Rise & Non-Temp. Rise to 180 minutes)	12"	33"	100"	1/2"
Other Than Doors (to 90 minutes)	76"	76"	3,422"	5/8"

85 Liberty Ship Way, Suite 110B • Sausalito, California 94965
Toll-Free: (877) 376-3343 • Telephone: (415) 331-6379
Fax: (415) 289-0326 • www.firesafe-glass.com

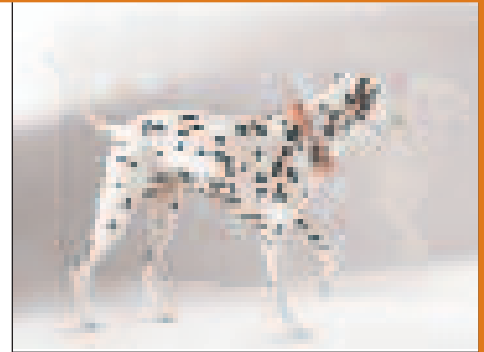

PYRAN® Platinum is a 3/16" (5 mm) fire rated glazing material is a transparent glass-ceramic that is near optical quality with virtually no surface distortion. Pyran® Platinum is listed for use in non-impact safety rated locations such as transoms and borrowed lites with fire rating requirements up to 90 minutes.

PYRAN® Platinum F is a 3/16" (5 mm) fire rated glazing has a surface applied 3M Scotchshield® Ultra Film and is listed for use in safety-rated locations such as door lites, transoms, sidelites and windows up to 90 minutes (180 minutes in doors).

PYRAN® Platinum uses an innovative, patented manufacturing process to produce an exceptional glass-ceramic specifically designed for the North American fire-rated glass market. And, this product is also the only fire-rated glass-ceramic that is made without the use of the hazardous heavy metals arsenic, antimony and barium—so it is environmentally friendly! It is tested and listed by UL, and is an outstanding replacement for wired glass.



General Characteristics

	PYRAN® Platinum	PYRAN® Platinum F	PYRAN® Platinum L
Thickness	3/16" (5mm)	3/16" (5mm)	3/8" (9mm)
Weight/sq.ft.	2.5 lbs./sq.ft.	2.5 lbs./sq.ft.	4.0 lbs./sq.ft.
Approx. Visible Light transmission	80%	80%	73%
Safety rating	None	ANSI Z97.1 and CPSC 16 CFR 1201 (Cat. II)	ANSI Z97.1 and CPSC 16 CFR 1201 (Cat. II)
Fire rating	20 to 90 minutes	20 minutes to 180 minutes	
Surface Finish	Nearly invisible micro-structure	Mirror-like	Mirror-like

LISTINGS

Listed and labeled by Underwriters Laboratories, Inc. for the United States and Canada with File No. R22036 (SCHOTT). All fire tests performed in accordance with UL 9, UL 10C, NFPA 252*, NFPA 257, NFPA 80, ASTM E2010-01, ASTM E2074-00, ULC CAN4-S104* and ULC CAN4-S106. (*Platinum F and Platinum L only.)

INSTALLATION AND CARE

PYRAN® Platinum shall only be installed into fire-rated frame and window assemblies carrying the same rating. Each PYRAN® Platinum panel should be inspected carefully before installation, and any pieces with visible edge or surface damage should be sorted out. All glazing components and the stop height must be chosen according to the PYRAN® Platinum UL classification. The panel must be placed on calcium silicate or hardwood setting blocks and glazed using PYRAN® Platinum classified glazing tape, such as closed cell PVC, Fiberfrax tape or Pemko FG3000S90. The installation of the framed unit must comply with the frame supplier's instructions.

To maintain the aesthetics, it is important to keep the panel clean. A soft, clean, non-abrasive cloth and a mild soap, detergent, or non-abrasive window cleaning solution is suitable for cleaning. After cleaning, rinse immediately with clean water and remove any excess water from the panel surface. Also, do not allow any metal or hard parts of the cleaning equipment to come in contact with the panel surface.

STORAGE AND HANDLING

PYRAN® Platinum fire-rated glass-ceramic should be handled with care during transportation, storage, inspection, and installation. It should be stored in dry conditions only and needs to be stacked uprights or at a slight angle. In addition, the panels must be separated by an appropriate soft material and the bottom edge must be supported along its entire length.

QUALITY STANDARD

PYRAN® Platinum is a specially developed glass-ceramic that fulfills the fire protection rating requirements. The production process may create certain optical imperfections, such as bubbles or knots. Since these do not generally impair the transparency or the technical performance of the glass-ceramic, they do not represent cause for rejection or replacement. Failure to comply with any of the storage, handling, installation, and/or care guidelines may result in a loss of warranty.

MANUFACTURER'S LIMITED WARRANTY

SCHOTT North America, Inc. provides a manufacturer's 30-day limited warranty for PYRAN® Platinum and a 3-year limited warranty for Platinum F. This warranty provides for the replacement cost of the glass only. Call or write for complete warranty details.

LABELING

All products are labeled bearing the manufacturer's name, testing laboratory, fire rating and safety standards.

SPECIFICATIONS

All glazing shall be designated on the drawings as 3/16" PYRAN® Platinum or PYRAN® Platinum F supplied by InterEdge Technologies. A complete 3-part CSI spec is available by calling toll-free (877) 376-3343, or by downloading www.firesafe-glass.com.

SIZING

Stop height 5/8" (1/2" for doorlites). Bite 3/8" (1/4" edge space around perimeter). Stop width with glazing tape 7/16" (3/8" glass thickness + 1/8" glazing tape on both sides of glass).



85 Liberty Ship Way, Suite 110B
Sausalito, California 94965
Toll-Free: (877) 376-3343
Telephone: (415) 331-6379
Fax: (415) 289-0326
www.firesafe-glass.com